


**DENON**  
*PROFESSIONAL*

# DN-U210

2 UNIT 2 FREQUENCY DIVISION INVERTER SPEAKER

**DENON**  
*PROFESSIONAL*

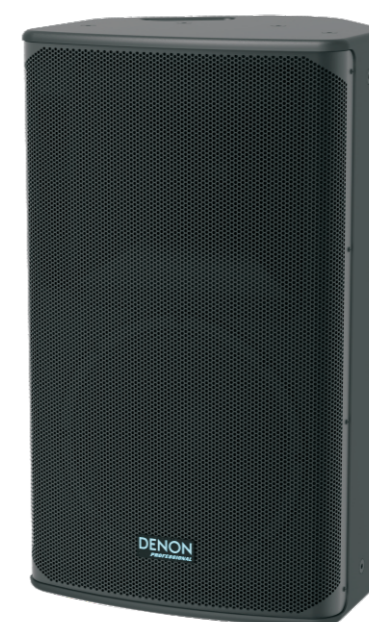

## DN-U210

The new U Series two-way enclosure series features high power ratings with custom components, a sleek look and a unique, snap-in metal grille. The DN-U210 is a two-way system featuring tweeter protection, 1.4" diaphragm horn-loaded tweeter, and one high-performance 10" woofer. It is rated at 250 Watts continuous and 500 Watts program. This lightweight speaker system is ideal for smaller venues where space is at a premium. Connections include two NL-4 four-pin twist-lock jack. The U Series is available in black.

### FEATURES

- Two-way sound reinforcement enclosure
- Designed for permanent installations
- Premium 10" woofer
- 1.4" diaphragm horn-loaded tweeter
- Tweeter protection included
- Available in black
- Handle on top of rear panel

### SPECIFICATION

- Type: Two-way passive crossover speaker system
  - Continuous power: 250W
  - Program power: 500W
- Impedance: 8 OHMS
- Sensitivity (1W@1m): 96 dB
- Maximum sound pressure level (1 meter): 120 dB @250W (123 dB @500W Program)
- Frequency response: 1 meter on-axis, swept-sine in anechoic environment:
  - 52 Hz—23 kHz, +/-6 dB
- Nominal coverage pattern (-6 dB): 90° H×60° V
- Transducer complement: 1 x 1.4" (36mm VC) diaphragm, 1" exit
  - 1 x 10" woofer (65mm VC)
- Input connections: NI4 4-pin jack × 2 PIN 1+2+ = (+) POSITIVE, PIN 1-2- = (-) NEGATIVE
- Material: 25mm (1")+15mm (0.6") plywood
- Surface treatment: Black textured polyester paint
- Dimensions: H 545mm x W 330mm x D 319.3mm
  - H 21.46" x W 13" x D 12.57"
- Packing size: H 620mm x W 400mm x D 390mm
  - H 24.41" x W 15.75" x D 15.35"
- Net Weight: 15.4kg (34lbs)

### FLYING OR MOUNTING THE DN ENCLOSURE

**⚠ CAUTION:** Before attempting to suspend this speaker, consult with a certified structural engineer. Speaker can fall from improper suspension, resulting in serious injury and property damage. Do not suspend or mount any other product or device from this enclosure! Use only the correct mating hardware. All associated rigging is the responsibility of others. Maximum enclosure angle 30 degrees.

Whenever possible, in addition to the nominal primary mounting method, use a suitable safety chain or wire rope attached to one of the other groups of fly point inserts, and firmly attached to a suitable structural member as indicated by a certified structural engineer.

We recommend the use of Tread-locker at the insert point bolts, so the bolts cannot vibrate loose. Never transport the cabinet using the array bracket or other mounting brackets as a structural member, while the cabinet is mounted on an array bracket or other mounting bracket and unsupported otherwise, as this may unduly stress the mounting inserts.

This DENON® loudspeaker should be suspended overhead only in accordance with the procedures and limitations specified in the User's Manual and possible manual update notices. This system should be suspended with certified rigging hardware by an authorized rigging professional and in compliance with local, provincial or national suspension ordinances.

### INSTALLATION

**⚠** The fourteen M8 1.25 mm per thread threaded mounting suspension points (4 top, 2 bottom, 4 each both sides) are provided. These are plugged with a hex key beveled head bolt.

The fourteen mounting suspension points are for use with forged shoulder machinery eye bolts and should be an M8 size, 1.25 mm per thread, and must conform to at least DIN 580 or ASTM A489, or whatever local, provincial or national suspension ordinances or regulations may additionally require. Eye bolts must be used in groups of 3 or 4, never use just one or two eyebolts to hang the speaker overhead.

